PowerBrick+ 12v Lithium-Ion battery pack

12V battery pack - Lithium Iron-Phosphate (LiFePO4) - 7.5Ah

- High service life: 3000 cycles and more (see chart)
- Deep discharge allowed up to 100 %
- Ultra safe Lithium Iron Phosphate chemistry (no thermal run-away, no fire or explosion risks)
- Embedded BMS (Battery Management System) : improve lifespan AND secure the battery
- Direct replacement of YUASA NP7-12
- Calendar life > 10 years
- Excellent **temperature** robustness (-20 °C up to +60 °C)

Technical Specifications

- Flexible deployment : up to 16 packs in parallel and 4 in series
- No Lead, no rare earths, no acid, no degassing
- Very low Peukert's losses (energy efficiency >98 %)
- Very low self discharge (<3 % per month)
- No memory effect
- About **50 % lighter** and **40% smaller** than equivalent Lead-AGM battery with same usable energy
- Certification : CE, RoHS, UN 38.3

| Electric | Nominal voltage | 12.8V |
|--------------------|--|---|
| | Nominal capacity | 7.5 Ah |
| | Stored energy | 96.0 Wh |
| | Internal resistance | ≤ 40mΩ |
| | Cycles | >3000 cycles (see chart) |
| | Self discharge | < 3% per month |
| | Energy efficiency | > 98% |
| Standard Charge | Charge voltage | $14.4 V \pm 0.2 V$ |
| | Charge mode | CC/CV : Constant Current / Constant Voltage |
| | Continuous charge current / Maximum charge current | 7.5 A / 10 A |
| | BMS charge cut-off voltage | $14.8V\pm0.1V$ |
| Standard Discharge | Instant peak discharge current | 105 A ±10 A (max 100mS) |
| | Continuous discharge current | 15 A (192 Wh) |
| | Maximum discharge current (< 30s) | 20 A (256 Wh) |
| | BMS discharge cut-off voltage | 10 V |
| Environment | Charge temperature range | 0°C to +60°C |
| | Discharge temperature range | -20°C to +60°C |
| | Storage temperature | 0°C to +60°C @60±25% relative humidity |
| | IP protection level | IP 65 |
| Mechanical | Type of cells | Cylindrical |
| | Casing material | ABS |
| | Dimensions | L : 151mm x P : 65mm x H : 92 mm (same as NP7-12) |
| | Weight | 1.08 kg |
| | Terminal | Clip Faston 6.35mm |

SHIP RANGE





APPLICATIONS


- Electrical vehicules and utilities
- Robotics and AGVs
- Solar and wind energy storage
- Marine
- Street lightning
- CCTV and security camera
- UPS, electric back-up
- Telecom
- Medical equipments
- • •



Charts and curves

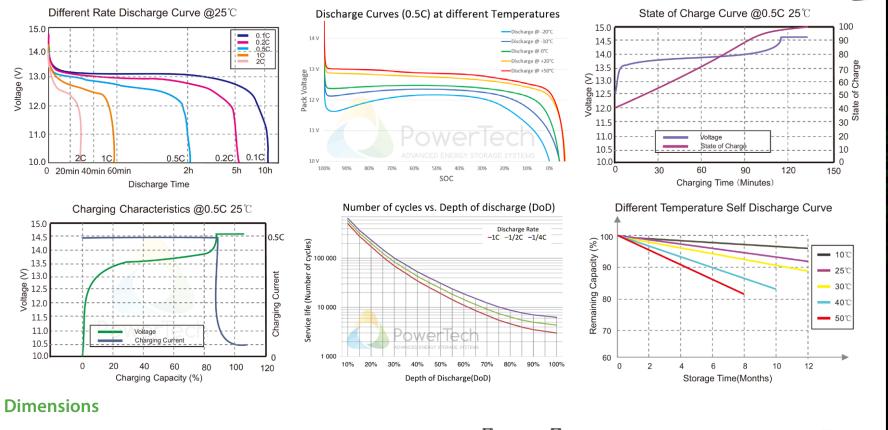

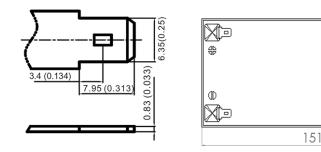

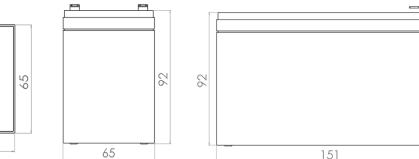



12V

7.5Ah

PowerTech

Power Brick +

PowerBrick + 7.5 Lithium Ferro Phosphate (LFF 12.8V - 7.5Ah - 96Wh Max input voltage : 14.6V

ROHS CE

V1.4

Ship control Srl Via dei Ghivizzani 1743b 55040 Loc. Piano di Mommio Massarosa - Lucca

www.shipcontrolstore.it 05841660878 info@shipcontrol.it